

VOL. 120



TITAN[®]

FULL LINE CATALOG





THE BEST AND LONGEST WARRANTY IN THE INDUSTRY

Four-Year Manufacturer's Defect

We pledge that our sprayers are free from defects in materials and workmanship. This excludes normal wear items and consumables such as filters, piston, packings, tips, etc.

Lifetime DuraLife Brushless HE and PMDC Brushless Motor Warranty

If the motor fails for any reason (including wear) for as long as you own the sprayer, we will replace the motor at no cost to you.

Limited Lifetime DCX Motor Warranty

If the motor fails from normal usage for as long as you own the sprayer, we will replace the motor at no cost to you.

Gas Engine Warranty

Three-year Honda® and two-years all others.

Two-Year Turbine Warranty

Lifetime Drive Train Warranty

If the drive train fails from normal usage for as long as you own the sprayer, we will replace the drive train at no cost to you.

Lifetime Warranty on PermaStroke™ Technology Fluid Pump

Get a lifetime warranty on the PermaStroke Technology fluid pump. If the fluid pump fails for any reason (including wear) for as long as you own the sprayer, we will replace the fluid pump at no cost.

35-Day Satisfaction Guarantee

If for any reason the sprayer does not perform up to your expectations within 35 days, the sprayer can be exchanged for the identical model or full credit toward the purchase of a Titan sprayer of larger size and value.

Express Parts Program

- ▶ More than 550 Authorized Service Centers nationwide
- ▶ The most common repair parts are guaranteed to be in stock 100% of the time
- ▶ If for any reason your preferred Authorized Service Center is out of stock, free 2nd day air is available when ordered by 3:00 pm (EST)

SEE BACK PAGE FOR OUR PLATINUM AND ELITE PROGRAMS.



TITAN®

FULL LINE CATALOG

04 **IMPACT®**

Durable electric airless sprayers built with smart features that make an Impact.

09 **AIRLESS & AIR-ASSISTED FINE FINISHING**

Delivers beautiful finishes quickly and easily.

14 **THERMOMARK**

Extremely durable thermoplastic pavement-marking equipment

05 **ELITE™**

Perfect for the contractor who is looking for a lightweight, portable sprayer for smaller-to-medium-sized jobs.

10 **CAPSPRAY®**

Maximize productivity and profit with these lightweight, portable sprayers.

15 **FASTMELT**

Self-contained thermoplastic melting system for use with any ThermoMark thermoplastic applicator.

06 **POWRBEAST™**

Heavy duty direct immersion sprayers capable of spraying heavy to light-bodied coatings.

11 **POWRCOAT™**

Pneumatic sprayers for virtually any heavy-duty application.

16 **AIRLESS GUNS**

Guns that deliver a perfect finish the first time—every time.

07 **POWRTWIN®**

For large-scale residential, commercial and industrial applications.

12 **POWRLINER™**

A broad line of pavement- and turf-marking equipment for all size projects.

18 **AIRLESS TIPS**

Renowned in the industry for their fan pattern consistency and long life.

08 **HYDRA™**

The ultimate sprayers for any job where maximum power is required.

13 **LAZYLINER™**

Take a load off and increase productivity up to four times. An economical way to grow your business.

OUR MISSION

When your business depends on the tools you use,
you need to count on the people who make them.

Our relentless commitment to helping all professional painters be
their best leads to better work, improved ROI and growing business.

IMPACT® SERIES

Features:

Field Serviceable Fluid Section

One-piece polyethelene packings and no cylinder to wear out.

DuraLife™ Brushless HE Motor

Available on 540–1640 models
Optimized for every tip size and every painter's technique.

Digi-Trac™ Digital Display

Available on 640, 840, 1140 and 1640 models
No pressure fluctuation, X-Lock anti-theft and
resettable gallon counter and hour meter.



Sureflo™ Pusher Valve

Unstick the lower ball valve with the push of a button. No need for a hammer.

Available on 440–640 models



AutoOiler™

Deliver oil to the packings with the push of a button.

Standard on models 440 and larger.



EasyOut™ Fluid Section

T-slot piston and release mechanism makes removal fast and easy.

Available on the Impact 1140 only.

IMPACT

Business is demanding and you need the kind of performance you expect from Titan sprayers. It's time to invest in the expanded features and performance that will make a major IMPACT on your profit margin.



	Impact 410	Impact 440	Impact 540	Impact 640	Impact 740	Impact 840	Impact 1040	Impact 1040T	Impact 1140	Impact 1640
SPECIFICATIONS										
Max. Delivery	0.47 GPM	0.54 GPM	0.60 GPM	0.70 GPM	0.80 GPM	1.00 GPM	1.15 GPM	1.15 GPM	1.20 GPM	1.50 GPM
Max. Tip Size (1 Gun)	0.021"	0.023"	0.024"	0.027"	0.029"	0.032"	0.033"	0.033"	0.034"	0.039"
Max. Tip Size (2 Guns)	----	----	----	0.017"	0.019"	0.021"	0.022"	0.022"	0.023"	0.027"
Max. Operating Pressure	3100 PSI	3300 PSI	3300 PSI	3300 PSI	3300 PSI	3300 PSI	3300 PSI	3300 PSI	3300 PSI	3300 PSI
Gun Included	RX-80 4F	RX-80 2F	RX-Pro	RX-Pro	RX-Pro	RX-Pro	RX-Pro	RX-Apex Non-Filter	RX-Pro	RX-Apex Non-Filter
Motor	0.75 HP PMDC	0.875 HP PMDC	1.20 HP BL	1.55 HP BL	2.00 HP BL	2.30 HP BL	2.50 HP BL	2.50 HP BL	2.60 HP BL	3.60 HP BL
Voltage	120V	120V	120V	120V	120V	120V	120V	120V	120V	230V
CONFIGURATIONS										
Skid	0532052	805-000	805-001	805-002	----	----	----	----	----	----
High Rider	0532053	805-016	805-006	805-004	805-007	805-009	0552600	2405360	805-011	2404441
Low Rider	----	805-019	805-003	805-005	805-008	805-010	----	----	805-012	----

All configurations come with a 517 TR' Tip and 1/4" x 50' airless hose.

ELITE 3000

Perfect for everyday use on residential, property maintenance and small commercial applications applying most architectural coatings such as interior and exterior latex, stains, lacquers, sealers, enamels and primers with ease.

Features:

PermaStroke™ Technology

- Continuously stroking system eliminates deadband, delivering consistent coverage
- No piston or packings, cylinder or clutch to wear or burn out.
- Lifetime warranty on fluid pump
- Delivers top performance at pressures from 0 to 3300 PSI when using small or large tips.

Sureflo™ Pusher Valve

Unstick the lower ball valve with the push of a button.

Multi-position Cart

Allows for a low rider siphon or high rider direct immersion set-up.

Field Serviceable

With only two cartridge-style wear parts that change out in 5 minutes or less.



Elite 3000 High Rider with rigid suction set

Elite 3000 Low Rider with flexible suction set

Elite 3000	
SPECIFICATIONS	
Max. Delivery	0.60 GPM
Max. Tip Size	0.025"
Max. Operating Pressure	3300 PSI
Gallons Per Week	100–150
Motor	1.2 HP DCX
Gun Included	RX-Pro
CONFIGURATIONS	PART NO.
Elite 3000	2402333

Elite 3000 comes with a 517 TR' Tip and 1/4" x 50' airless hose.

ELITE 3500

The perfect sprayers for the contractor who is looking for a lightweight, gas-powered sprayer, for small to medium-sized jobs.

Features:

PermaStroke™ Technology

- Continuously stroking system eliminates deadband, delivering consistent coverage
- No piston or packings to wear or replace
- Lifetime warranty on fluid pump
- Proven Technology with a 50-year history of pumping paint

FlatLine Pulsation Dampener™

Eliminates all pressure fluctuations in the system

Extremely Rugged & Durable

POWERED by
HONDA™



Elite 3500 High Rider

Elite 3500	
SPECIFICATIONS	
Max. Delivery	0.75 GPM
Max. Tip Size	0.27"
Max. Operating Pressure	3300 PSI
Gallons Per Week	50–100
Engine	120cc Honda® GX 120
Gun Included	RX-Pro
CONFIGURATIONS	PART NO.
High Rider	0537012
Low Rider	0537013

Elite 3500 comes with a 517 TR' Tip and 1/4" x 50' airless hose.

POWRBEAST™ SERIES



Features:

HydraStroke Technology™

- Extremely efficient digitally-driven hydraulics with only one moving part
- Delivers the power to spray light to extremely heavy-bodied coatings
- The system is optimized to reduce heat extending its duty cycle
- Simplified pump assembly for easier service

Intelligent Design Styling

- Optimized cooling system
 - Shroud directs maximum air flow
 - Radiator-style active cooling hydraulic tank
- Large 12" pneumatic tires make it easier to move around job sites

Severe Service™ Fluid Section

- Long and slow stroking piston maximizes power and durability
- Proven Titan technology with 35 years in the field
- Field serviceable with easy to remove/replace fluid section

POWERED by
HONDA™

POWRBEAST

A heavy-duty electric and gas-powered direct immersion sprayer for contractors who need more power and durability for large-scale jobs.



■ PowrBeast 9700 Gas



■ PowrBeast 4700T Electric

SPECIFICATIONS	ELECTRIC		GAS POWERED		
	PowrBeast 4700	PowrBeast 4700T	PowrBeast 4700	PowrBeast 7700	PowrBeast 9700
Max. Delivery	1.10 GPM	1.10 GPM	1.60 GPM	2.00 GPM	3.00 GPM
Max. Tip Size (1-Gun)	0.033"	0.033"	0.041"	0.047"	0.055"
Max. Tip Size (2-Guns)	0.023"	0.023"	0.029"	0.033"	0.039"
Max. Tip Size (3-Guns)	0.019"	0.019"	0.021"	0.027"	0.031"
Max. Tip Size (4-Guns)	----	----	0.019"	0.023"	0.027"
Max. Tip Size (5-Guns)	----	----	----	----	0.023"
Max. Operating Pressure	3300 PSI	3300 PSI	3000 PSI	3300 PSI	3300 PSI
Gallons Per Week	100-200	100-200	100-200	200+	200+
Engine/Motor	2HP Brushless AC	2HP Brushless AC	160 CC Honda® Engine	200 CC Honda Engine	270 CC Honda Engine
Includes	RX-Pro Gun, TR! 517 Tip, 1/4" x 50' hose	M-4 Gun with Splatter Nozzle, 3/8" x 50' Hose	RX-Pro Gun, TR! 517 Tip, 1/4" x 50' hose	RX-Pro Gun, TR! 517 Tip, 1/4" x 50' hose	RX-Pro Gun, TR! 517 Tip, 1/4" x 50' hose
Part Number	0537000	0537010	0537001	0537005	0537007

POWRTWIN™ SERIES

Features:

Severe Service™ 900 Pump

- Cylinder and piston rod are tempered with a proprietary heat-treating process that increases pump life 150% over competitive pumps.
- Self-adjusting packings resist over-tightening and help prevent premature wear.

Speeflo® HydraDrive™

Smooth, slow-stroking hydraulic drive provides extreme power and reliability.

Accurate Pressure Control

Ranges from 400 to 3600 PSI.

Long Life & Durable

Longest stroking portable sprayer in the market.

Convertible

Easy, tool-free convertibility for projects where gas engines are not permitted.
2.0 HP Electric Converto Kit (506-719) sold separately.



Belt Guard

Easy access for converting from gas to electric.

POWERED by
HONDA™

Speeflo
HydraDrive



POWRTWIN

Since their introduction more than 25 years ago, PowrTwin gas/electric convertible hydraulic piston sprayers have been the choice of serious contractors for large scale residential, commercial and industrial applications.



PowrTwin
6900 Plus

POWRTWIN DI

These are the most powerful portable sprayers on the market today. They decrease power loss during intake which increases efficiency. And each is built to hook up multiple guns or apply thick coatings like drywall compound or elastomerics.



PowrTwin
12000 Plus DI

SPECIFICATIONS	ELECTRIC POWERED			GAS POWERED					
	PowrTwin 6900 Plus Electric	PowrTwin 8900 Plus Electric	PowrTwin 6900 Plus DI Electric	PowrTwin 4900 Plus	PowrTwin 6900 Plus	PowrTwin 8900 Plus	PowrTwin 12000 Plus	PowrTwin 6900 Plus DI	PowrTwin 12000 Plus DI
Max. Delivery - Gas	2.25 GPM	2.50 GPM	2.25 GPM	1.50 GPM	2.25 GPM	2.50 GPM	3.15 GPM	2.25 GPM	3.15 GPM
Max. Tip Size (1 Gun) - Gas	0.050"	0.054"	0.050"	0.038"	0.050"	0.054"	0.058"	0.050"	0.058"
Max. Tip Size (2 Guns) - Gas	0.033"	0.038"	0.033"	0.028"	0.033"	0.038"	0.040"	0.033"	0.040"
Max. Delivery - Electric	1.25 GPM	1.25 GPM	1.25 GPM	1.10 GPM	1.25 GPM	1.25 GPM	1.25 GPM	1.25 GPM	1.25 GPM
Max. Tip Size (1 Gun) - Elec.	0.036"	0.036"	0.036"	0.031"	0.036"	0.036"	0.036"	0.036"	0.036"
Max. Tip Size (2 Guns) - Elec.	0.026"	0.026"	0.026"	0.023"	0.026"	0.026"	0.026"	0.026"	0.026"
Max. Operating Pressure	3300 PSI	3300 PSI	3300 PSI	3300 PSI	3300 PSI	3300 PSI	3600 PSI	3300 PSI	3600 PSI
Engine/Motor	2.00 HP	2.00 HP	2.00 HP TEFC DC	160cc Honda GX 160	160cc Honda GX 160	200cc Honda GX 200	270cc Honda GX 270	160cc Honda GX 160	270cc Honda GX 270
Gun Included	S-3	RX-Apex Non-Filter	RX-Apex Non-Filter	RX-Pro	S-3	RX-Apex Non-Filter	RX-Apex Non-Filter	RX-Apex Non-Filter	RX-Apex Non-Filter
CONFIGURATIONS	PART NO.	PART NO.	PART NO.	PART NO.	PART NO.	PART NO.	PART NO.	PART NO.	PART NO.
With Gas Engine	----	----	----	0290012	0290013	0290018	0290016	0290021	0290023
With Electric Motor	0290028	0290027	0290029	----	----	----	----	----	----

All configurations come with a 517 TR¹ Tip and 1/4" x 50' airless hose.

HYDRA™ SERIES

Features:

Maximum Fluid Section Life

Titan's ultra slow-stroking hydraulic piston maximizes fluid section life.

Speeflo® HydraDrive™

Smooth, slow-stroking hydraulic drive provides extreme power and reliability.

Designed for Ultra-Heavy Coatings

Including mastics, waterproofing and roof coatings.

High Production Unit

Handles all architectural coatings including epoxies and roof coatings.



High Performance

Great for hard-to-spray coatings, multiple guns and long hose lengths.

HYDRA

Bridges, water tanks, roofing, foundations and other large projects require the kind of hydraulic piston power only a Hydra can deliver. It is the ultimate sprayer for any job where maximum power is required and dependability is critical.



Hydra Pro IV

High-production unit for all architectural coatings, dry wall mud, epoxies, most mastics and elastomeric roof coatings.

Hydra M 4000

Delivers the added pressure needed for hard-to-atomize coatings or long hose runs.

Hydra M 2000

High-production sprayer for below-grade waterproofing and roof coatings.

Hydra M 4000 55 Gallon Remote

433-802



	Pro IV	M 2000	M 4000
SPECIFICATIONS			
Max. Delivery	2.50 GPM	6.00 GPM	3.30 GPM
Max. Tip Size	0.050"	0.075"	0.060"
Max. Operating Pressure	3300 PSI	2000 PSI	4000 PSI
Cycles Per Gallon	24	7	13
Engine	270cc Honda® GX270	390cc Honda® GX390	390cc Honda® GX390
CONFIGURATIONS			
	PART NO.	PART NO.	PART NO.
Filter Model	433-820	----	433-801
3/4" Outlet Model	----	----	433-800
1" Outlet Model	----	433-860	----

Features:

High Production Fine Finishing

All Architectural Coatings

From clears to finish-quality latex.

Zero Pressure Fluctuation

ED 655 Plus

The ED 655 is a compact, lightweight, dedicated finishing system that's easy to use, easy to transport and, most importantly, dependable. For those projects and the contractors who tackle them, we designed the Titan ED 655 Plus.

AirCoat®

Two systems in one! Uses low airless fluid pressure in the air-assisted mode to deliver ultra fine atomization with higher transfer efficiency. The airless mode uses high pressure to spray interior and exterior paints. You can atomize all fine finish coatings at lower pressure for great control. The AirCoat also includes suction set for pumping directly from a five-gallon bucket.

MultiFinish® 440

The MultiFinish 440 is designed as a high production fine finish air-assisted airless system built on the legendary Titan 440 airless spayer platform offering two systems in one. It sprays all coatings with little or no reduction.



ACCESSORIES:

GM 3600 AA Gun with Reversible Tip Guard 0524357

This design offers ergonomic comfort and a reversible tip system without sacrificing finish quality. Comes with a G-10 style filter and works with all standard reversible airless and fine finish tips.

AirCap and tips sold separately.



GM 3600 AA Gun with Flat Tip Guard 0524358

Includes a 9/20 flat tip.

Red/Clear 50-foot Bonded Hose 0524333



SPECIFICATIONS	AIRLESS	AIR ASSISTED AIRLESS	
	ED 655 Plus	AirCoat	MultiFinish 440
Max. Delivery	0.35 GPM	0.35 GPM	0.54 GPM
Max. Tip Size (1-Gun)	0.017"	0.017"	0.023"
Max. Fluid Pressure	60–2800 PSI	60–2800 PSI	3300 PSI
Max. Air Pressure	----	35 PSI	35 PSI
Weight	27 lbs.	56 lbs.	90 lbs.
Fluid/Air Hose Length	50' with 3' Whip	50' with 5' Whip	50'
Spray Gun	RX-80™	GM3600	GM3600
Pump Motor	1/2 HP TEFC	1/2 HP TEFC	7/8 HP PMDC
	PART NO.	PART NO.	PART NO.
	0508090	0508074A	0524029

CAPSPRAY™ SERIES

Features:

Powerful Atomization

Atomizes coatings with little or no thinning.

High Transfer Efficiency

Ranges up to 90%.

Dual Air Filtration

Available on 95, 105 and 115 models
An automotive type air filter on the atomizing air side

Pre-Filter

On both atomizing air and cooling air sides.

Built-In Toolbox

For needles, nozzles, air caps and nozzle wrench.

Built-In Cup Holder

Also serves as docking station for Transfer Pump accessory.

Dirty Filter Warning Light

Extend the life of your turbine and maintain maximum performance with clean filters.

CAPSPRAY

High-end woodworking, cabinetry and furniture finishing projects require the high transfer efficiency that only Titan Capspray can deliver. These lightweight, portable HVLP sprayers will apply all fine finishes with speed and precision – maximizing both productivity and profit.



■ Capspray 105 with Maxum Elite Gun



■ Capspray 95 with Maxum II Gun

Note: Capspray units include one (1) Titan HVLP gun.

	Capspray 75	Capspray 95	Capspray 105	Capspray 115
SPECIFICATIONS				
Air Pressure	7.5 PSI	9.5 PSI	10.5 PSI	11.5 PSI
Turbine	3-Stage Tangential	4-Stage Tangential	5-Stage Tangential	6-Stage Tangential
Hose Length	25'	30'	30' and 5' Whip	30' and 5' Whip
Weight	20.5 lbs.	21.0 lbs.	22.0 lbs.	23.0 lbs.
Needle Nozzle Set (Additional)	----	----	#4	#4, #5
CONFIGURATIONS				
	PART NO.	PART NO.	PART NO.	PART NO.
With Maxum II Gun	0524031	0524032	0524098	0524099
With Maxum Elite Gun	----	----	0524033	0524034*

*Includes Gravity Cup Accessory.

ACCESSORIES:

2 Qt. Remote Cup 0524203

The remote cup system enables you to increase spraying time between refills without adding the cost and weight of a bulky air compressor.



Maxum Elite Gravity Gun 0524052

Easily changes from a standard to a gravity-fed pressure cup. Works with all competitive HVLP turbines.



3M® PPS™ Paint Preparation System

3M PPS Paint Preparation System is a unique, closed paint system that eliminates the need for separate mixing cups and filters. Instead, paint is mixed in a liner bag which marries to a direct filter and is then mounted on the spray gun with a dedicated adapter.

DESCRIPTION	PART NO.
PPS Starter Kit (Includes Pressure Cup, Gun Adapter, 10 Plastic Cup Liners and Lids)	CA91-589
Pressure Cup	CA91-560
Gun Adapter	CA91-575
Plastic Cup Liner and Lids (10)	CA91-562



Gun sold separately.

POWRCOAT™ SERIES

Features:

Premium is Standard

Minimal Maintenance

Titan's proven severe-duty fluid section with self-adjusting packings keep you working in the most demanding of jobsites.

Anti-icing Motor

Ensures continuous operation in all environments.

Power to Handle Any Job

The PowrCoat series pressure ranges from 3000 to 7500 PSI.

Flow

Outputs from one to four gallons per minute.

Self-adjusting

No packing nut to adjust

Severe Service™ Pump is Standard

- ▶ Severe-service paint pumps and high-efficiency air motors are standard on all models.
- ▶ PowrCoat piston is engineered to provide unmatched chemical and solvent resistance while creating an ultra-smooth surface that operates with a smooth stroke to provide less friction and wear.
- ▶ Tungsten carbide valve seats provide maximum life and smooth, efficient operation with hardened stainless steel check balls.

AirCare™ System

- ▶ Complete FRL (Filter, Regulator, Lubricator) standard for optimal durability with every PowrCoat
- ▶ Automatic draining moisture trap
- ▶ Easy access air filter and lubrication reservoir

POWRCOAT

Models for virtually any application, including architectural, finishing, industrial maintenance, corrosion control, roofing, waterproofing and marine; protective coatings.



▶ PowrCoat 1072



▶ Wall mount bracket designed into cart for flexibility. Available as wall mount only.

	PowrCoat 630	PowrCoat 730	PowrCoat 745	PowrCoat 940	PowrCoat 960	PowrCoat 975	PowrCoat 1045	PowrCoat 1064	PowrCoat 1072
SPECIFICATIONS									
Air Motor Diameter	6"	7"	7"	9"	9"	9"	10"	10"	10"
Ratio	30:1	30:1	45:1	40:1	60:1	75:1	45:1	64:1	72:1
Stroke Length	4"	4"	4"	4"	4"	4"	4.75"	4.75"	4.75"
Fluid Output per Cycle	61cc	182cc	114cc	182cc	114cc	95cc	254cc	188cc	167cc
Max. Recommended Output	1.5 GPM	4.0 GPM	2.8 GPM	4.0 GPM	2.8 GPM	2.1 GPM	4.0 GPM	3.0 GPM	2.7 GPM
Max. Recommended Vol. Requirements	36 CFM	98 CFM	102 CFM	116 CFM	128 CFM	133 CFM	172 CFM	171 CFM	173 CFM
Max. Air Input Pressure	116 PSI	100 PSI							
Max. Operating Pressure	3480 PSI	3000 PSI	4500 PSI	4000 PSI	6000 PSI	7500 PSI	4500 PSI	6400 PSI	7200 PSI
CONFIGURATIONS									
	PART NO.								
Cart (bare)	0533630C	0533730C	0533745C	0533940C	0533960C	0533975C	05331045C	05331064C	05331072C
Wall Mount (bare)	0533630W	0533730W	0533745W	0533940W	0533960W	0533975W	05331045W	05331064W	05331072W

POWRLINER™ SERIES

Features:

Versatility

Lets you stripe both pavement and athletic fields.

User Friendly Design

Easy to operate and maneuver.


Precise Pressure Control

From 400 to 3300 PSI, for spraying light-bodied coatings all the way up to low-VOC striping paints.



PowrCenter™

Designed with convenient and easy-to-use controls and features like tip holder, phone charging port and cup holder.



SmartArm™

Built to pivot and lift, making line adjustments and transportation quick and compact.¹




DeadLock Handlebars

Easily adjustable handlebars pivot in three ways; in and out, up and down and forward or back.¹

¹ Available on the PowrLiner 55 series only.

POWRLINER

Built with technology that delivers a best-in-class stripe with sharp and consistent line quality even on the toughest surfaces.

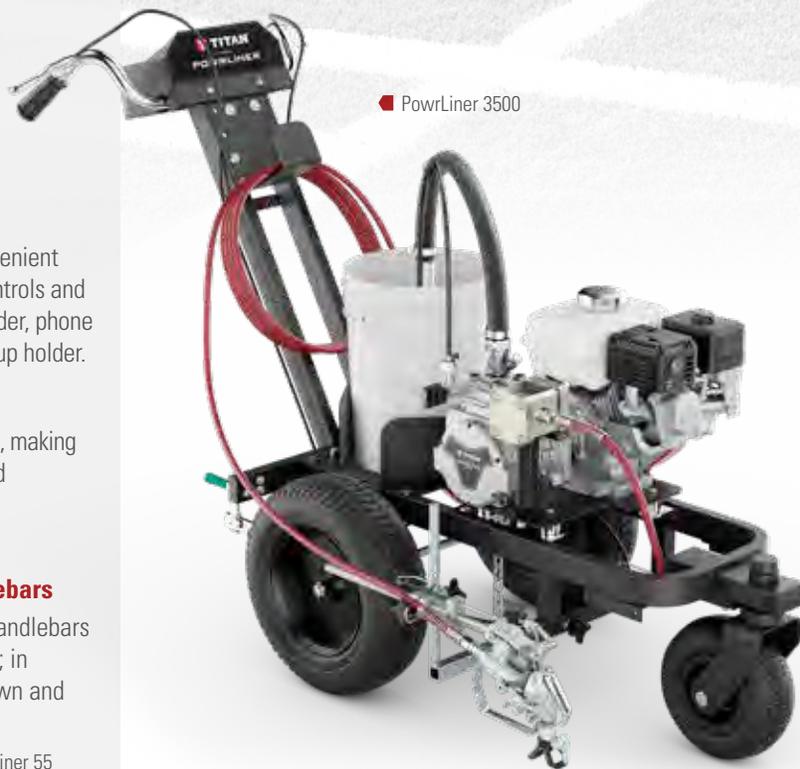

■ PowrLiner 3500



PowrLiner 850



PowrLiner 2850



PowrLiner 4955



PowrLiner 6955



PowrLiner 8955

	PowrLiner 850	PowrLiner 2850	PowrLiner 3500	PowrLiner 4955	PowrLiner 6955	PowrLiner 8955
SPECIFICATIONS						
Max. Delivery - Gas	0.33 GPM	0.92 GPM	0.75 GPM	1.25 GPM	2.25 GPM	2.50 GPM
Max. Tip Size - 1-Gun	0.021"	0.032"	0.027"	0.037"	0.050"	0.054"
Max. Tip Size - 2-Guns	----	0.019"	----	0.028"	0.033"	0.038"
Max. Operating Pressure	3000 PSI	3300 PSI	3300 PSI	3300 PSI	3300 PSI	3300 PSI
Engine - Gas	37.7cc	Honda® GX120 with Low Oil Alert	Honda GX120 with Low Oil Alert	Honda GX120 with Pull Start	Honda GX160 with Electric Start and Low Oil Alert	Honda GX200 with Electric Start and Low Oil Alert
Pump & Drive Technology	Clutch-driven Piston	Clutch-driven Piston	PermaStroke	Speeflo® HydraDrive™	Speeflo® HydraDrive™	Speeflo® HydraDrive™
CONFIGURATIONS						
	PART NO.	PART NO.	PART NO.	PART NO.	PART NO.	PART NO.
	0290005	0290009	0537015	0290052H	0290053H	0290054H

LAZYLINER™ SERIES

LAZYLINER

Take a load off and increase productivity up to four times when compared to walking. The LazyLiner Series will help you drive profits and tackle large jobs with ease.



LazyLiner Elite 0290040H

- Heavy-duty pneumatic tires (16" x 6.5")
- 100-Watt lamp coil charging system
- Engine protection bumper bar
- Hitch Required (see hitch chart below)



Available now with
Honda GX160 Engine.
(not pictured)

LazyLiner Pro 0290041H

- Standard pneumatic tires (16" x 4.5")
- Hitch Required (see hitch chart to the right)

Features:

Adjustable Comfort

Deluxe, high-back chair with adjustable comfort. Adjust seat forward/back and side to side. Adjust pedal height.

Weight Sensor

For safety shut-off.

Fully Compatible

Works with Titan PowrLiner 2850–8955.

	LazyLiner Pro	LazyLiner Elite
SPECIFICATIONS		
Engine - Gas	Honda® GX160 OHV	Honda GX200 OCV
Start	Pull	Pull or Electric
Speed - Forward	0–12 MPH	0–12 MPH
Speed - Reverse	0–7 MPH	0–7 MPH
CONFIGURATION		
	PART NO.	PART NO.
	0290041H	0290040H



Hitches and Accessories

	LazyLiner Pro	LazyLiner Elite
DESCRIPTION		
PowrLiner 2850	0290043Z	0290043Z
PowrLiner 3500	0290180	0290180
PowrLiner 3500 Hitch Bracket	0290182	0290182
PowrLiner 4950, 4900xlt, 6900xlt, 8900xlt	0290180	0290180
PowrLiner 6950, 8950	0290180	0290180
PowrLiner 4955, 6955, 8955	0290180	0290180
Graco® 3900 and Up	0290050Z	0290050Z
Bumper / Engine Protection Bar	0290646Z	Included

The drivers are not shipped with a hitch; use chart to identify which hitch to order.

THERMOMARK™ SERIES

Features:

The Industry's Only Insulated Reservoir

Bolt-together Design

Allows for modular updates and repairs.

Heats Up Quickly

- Heat 250 lbs of material in 45 min (est.)
- Heat 300 lbs of material in 1 hour (est.)

Easy Operation

- Dual front brakes for added control
- All controls are easily accessible
- Adjustable bead width lever with an "OFF" position
- Wheel and axle bearings deliver smooth operation
- Wide mouth bead box offers auto or manual bead application
- Rear swivel wheel increases maneuverability

Smart Design

- Dual-screen system filters out solids
- Easy-to-read thermostat
- Supply lines and valves are made of stainless steel, brass and copper
- Color-coded lifting rings for easy loading and unloading

THERMOMARK 250 and 300

ThermoMark handliners are built for small-to-medium jobs like crosswalks, turning arrows and parking lots.



UNIVERSAL ATTACHMENT



DOUBLEDROP BEAD SYSTEM UPGRADE AVAILABLE



SPECIFICATIONS	THERMOMARK 250 SINGLE/DOUBLE DROP	THERMOMARK 300 SINGLE/DOUBLE DROP
Material Capacity	250 lbs.	300 lbs.
Application Die Width	Min. 4" / Max. 12" Standard Custom width and dual line dies available	Min. 4" / Max. 12" Standard Custom width and dual line dies available
Heating Type	Propane (20 lb. bottle required)	Propane (20 lb. bottle required)
Die Heater	Infrared	Infrared
Empty Weight	235 lbs. (107 kg) / 315 lbs. (143 kg)	350 lbs. (158 kg) / 410 lbs. (186 kg)
Main Burner	Twin Ransome / 20,000 BTU	Twin Ransome / 40,000 BTU
Gas Control	Honeywell	Honeywell
Bead Dispenser	Wheel driven beader with application rate proportioned to ground speed	Wheel driven beader with application rate proportioned to ground speed
Bead Dispenser Width	Variable (4", 6", 8", 12" and off position)	Variable (4", 6", 8", 12" and off position)
Manual Front Pointer	Adjusts for all die sizes	Adjusts for all die sizes
Wheels	Dual solid front and single solid rear wheels provide smooth operation	Dual solid front and single solid rear wheels provide smooth operation
Material Agitation	Manual / horizontal shaft / reverse pitch / flow paddles	Manual / horizontal shaft / reverse pitch / flow paddles
Shipping Weight	450 lbs. (204 kg crated) / 510 lbs. (232 kg crated)	500 lbs. (205 kg crated) / 550 lbs. (250 kg crated)
Rear Swivel Wheel	Dual solid front and single solid rear wheels provide smooth operation	Precision engineered with quick release lever
Construction	Aluminum with bolt-together assy.	Aluminum with bolt-together assy.
Bead Capacity Reservoir	50 lbs. (23 kg) / 100 lbs. (45 kg)	65 lbs. (29 kg) / 130 lbs. (59 kg)
Dimensions:	52"L x 40"W x 37"H	52"L x 40"W x 37"H

THERMOMARK™ SERIES

Features:

Easy To Maintain

Safety First Features

Titan ASE has thought of everything. The FastMelt 650's fully modular design allows for complete replacement of all its parts – thus maximizing the longevity of your equipment and ensuring many years of dependable service and quality striping.

- Fills an applicator in minutes
- Melts and holds up to 650 lbs. (295 kg.) at 400° F (204° C)
- Fits in the back of a pickup
- Compact: 48" x 42" x 51" (W x D x H)
- Lightweight 950 lbs. (430 kg.) empty

Aluminum Dies are available in multiple sizes. (For ThermoMark handliners)




FASTMELT 650

The FastMelt 650 is a completely self-contained thermoplastic melting system that holds 650 lbs. (295 kg.) of material. It's one of the most versatile supply systems with the ability to be placed in the back of a standard pickup, flat-bed truck, or a work trailer for easy transport. For a highly-efficient striping system, use with any ThermoMark applicator.



SPECIFICATIONS	FASTMELT 650
Material Capacity	650 lbs.
Heating System	Propane
Empty Weight	950 lbs.
Loaded Weight	1,700 lbs.
LPG Fuel Tank	100 lbs.
Kettle Burner	Ransome
Gas Control	Chromalox
Hydraulic System	Two Stage high / low hydraulic pump
Spool Valve	HC-M45 directional control with relief
Hydraulic Reservoir	7 gal. (28 liter) with return filter
Engine	Honda® GX240
Construction	Modular design
Material Agitation	Direct drive serrated anchor agitator, adjustable speed control
Material Temperature Gauge	50° – 550° (10° -288° C)
Dimensions (L x W x H)	48" x 42" x 51" (122cm x 107cm x 130cm)

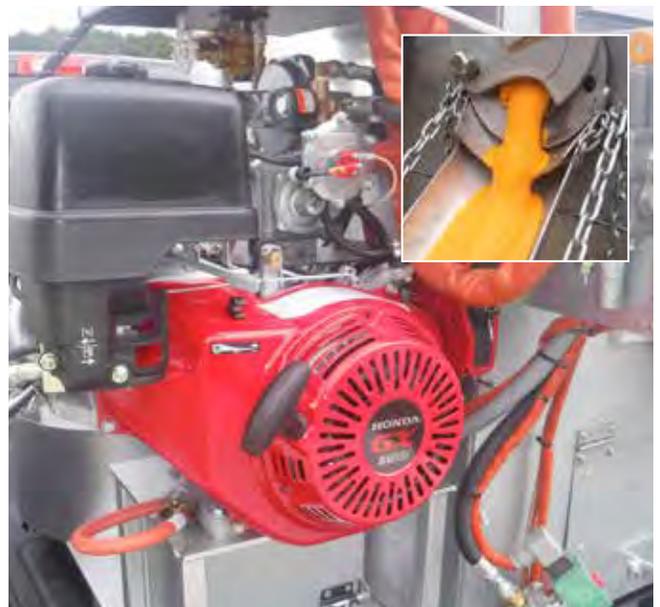

AIRLESS SPRAY GUNS

RX-PRO[®]

AIRLESS SPRAY GUN

The RX-Pro airless spray gun redefines spraying with unmatched comfort and durability including on-board tools like the built-in filter wrench that make jobsite life easier.



FingerPrint Grip™
Customize the grip to comfortably fit any painter's hand.



Ultra-light Trigger
30% lighter than the competitors trigger pull decreasing fatigue.



Infinity™ Packing
2X the gun life by reversing the seat and changing the ball.



Onboard Tools
Smart tools that make jobsite life easier.

- Comes standard with both two- and four-finger triggers
- Pressure rated at 3600 PSI (24.8 MPa)

DESCRIPTION	PART NO.
RX-Pro Airless Gun with TR ¹ Tip	0538020
RX-Pro Gun, Hose, 3' Whip Hose and TR ¹ Tip Kit	0538022
RX-Pro Gun, Hose, Whip Hose & TR ¹ HEA Tip Kit	0538033
RX-Pro Ball Valve Repair Kit	0538221



Three Grip Sizes Available

RX-Pro FingerPrint Grip

Customizable to your hand size.

DESCRIPTION	PART NO.
Small	0538217
Medium	0538218
Large	0538219

RX-80[™]

AIRLESS SPRAY GUN

The RX-80 features all-metal construction with durable tungsten carbide ball valve and seat for added durability. The RX-80 is available in 2 or 4 finger configuration.



Comfort Grip™
Ergonomic design brings added comfort.



Longer Life Packing Kit
Lasts longer with improved performance.



Onboard Tools
Smart tools that make jobsite life easier.



RX-80 Gun with Four-Finger and TR¹ Tip

- Comes with two- or four-finger trigger
- Pressure rated at 3600 PSI (24.8 MPa)

DESCRIPTION	PART NO.
RX-80 Airless Gun, Four-Finger with TR ¹	0538005
RX-80 Airless Gun, Two-Finger with TR ¹	0538006
RX-80 Airless Gun, Four-Finger with SC-6+	0538007
RX-80 Airless Gun, Two-Finger with SC-6+	0538008
RX-80 4-Finger Gun, Hose and Tip Kit with TR ¹ *	0538010
RX-80 4-Finger Gun, Hose and Tip w/ SC-6+*	0538011
RX-80 Repair Kit	0538215

*Includes additional 3' whip hose and a 2-finger trigger.

AIRLESS SPRAY GUNS


RX-APEX™

AIRLESS SPRAY GUN

-  **Infinity Packing®**
2X the gun life by reversing the seat and changing the ball.
-  **FingerPrint+ Grip™**
Fully adjustable grip delivers maximum customization.
-  **All-Day Trigger®**
28% lighter trigger pull force and 74% less hold force.
-  **Free-Flow Swivel**
Only direct feed airless gun with built-in swivel.

- ▶ Comes with two-finger trigger
- ▶ Pressure rated at 5000 PSI (34.5 MPa)

DESCRIPTION	PART NO.
RX-Apex, Non-Filtered Airless Gun with TR ¹ Tip	0538070
RX-Apex, Filtered Airless Gun with TR ¹ Tip	0538075
RX-Apex, Non-Filtered Airless Gun, Hose & TR ¹ Tip Kit	0538072
RX-Apex, Non-Filtered, High Pressure Airless Gun, Hose & TR ¹ Tip Kit	0538073
RX-Apex, Filtered Airless Gun, Hose & TR ¹ Tip Kit	0538076
RX-Apex, Filtered Airless Gun, Hose & SC-6+ Tip Kit	0538077

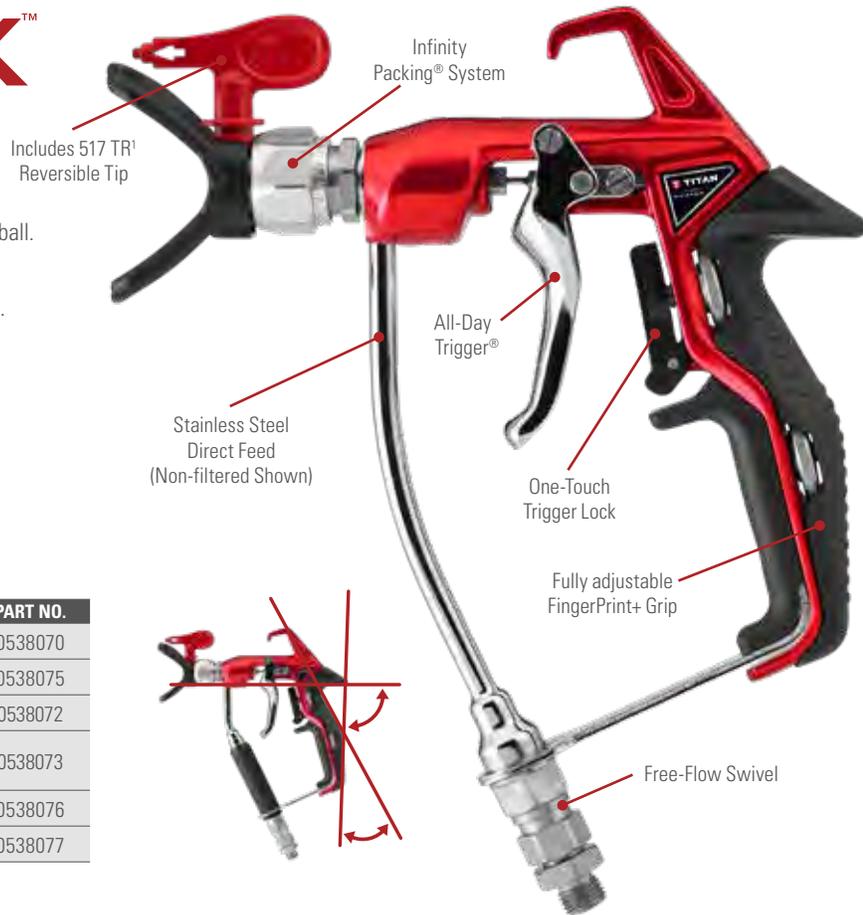

HANDLE HEAVY AND HIGH PRESSURE COATINGS WITH EASE

Titan S-Series stainless steel spray guns hold up under extreme pressure and built for contractors that need to spray at pressures from 3900–7700 PSI. The S-Series can handle corrosive coatings due to the stainless steel fluid passage. The tungsten carbide ball valve and seat will ensure long life and durability.

S-3 / S-7 Airless Gun

- ▶ In-handle filter
- ▶ Easy four-finger trigger pull
- ▶ Swivel reduces hose kinks
- ▶ S-3 is pressure rated at 3900 PSI (26.9 MPa)
- ▶ S-7 is pressure rated at 7700 PSI (53.1 MPa)



DESCRIPTION	PART NO.
S-3 Gun with TR ¹ Tip	0550060
S-3 Gun, Hose and Tip Kit	0550065
S-3 Repair Kit	550-275
S-7 Gun with 1/4" Swivel	550-260
S-7 Gun with 3/8" Swivel	550-270
S-7 Repair Kit	550-276

The M-Series guns are designed to handle the heaviest and harshest coatings with a unobstructed large fluid chamber and extremely durable stainless steel.

M-4 / M-8 Mastic Guns

- ▶ Straight line fluid passage allows max flow rate
- ▶ Angled handle for increased comfort
- ▶ Adjustable needle packing prolongs the life of critical wear parts
- ▶ Swivel allows freedom of movement without hose kinking
- ▶ Lightweight metal construction
- ▶ M-4 is pressure rated at 3600 PSI (24.8 MPa)
- ▶ M-8 is pressure rated at 7700 PSI (53.1 MPa)



DESCRIPTION	PART NO.
M-4 Mastic Gun	0289013
M-8 Mastic Gun	0289014
M-8 Repair Kit	2347489

AIRLESS SPRAY TIPS

TR¹ HEA Tips 330-XXX



FAN PATTERN WIDTH	ORIFICE SIZE (INCHES)							
	INCHES	MM	0.011	0.013	0.015	0.017	0.019	0.021
4-6	102-152	211	213					
6-8	152-203	311	313					
8-10	203-254	411	413	415	417			421
10-12	254-305			515	517	519	521	
12-14	305-356			615	617	619	621	
Flow (GPM)	----	0.09	0.12	0.18	0.24	0.31	0.47	
Flow (LPM)	----	0.34	0.45	0.68	0.91	1.17	1.79	

Maximum Working Pressure: 5000 PSI (34.5 MPa)

TR¹ HEA REVERSIBLE TIP

- Optimized to spray all architectural paints and coatings at 1,000 psi at production speed
- Decreases overspray up to 55% allowing contractors to spray more
- Less pressure equals less stress extending pump life and extending time between repacks
- Two times the life of a standard reversible tip



TR¹ HEA Reversible Tip

TR¹ Tips 695-XXX

FAN PATTERN WIDTH	ORIFICE SIZE (INCHES)										
	INCHES	MM	0.009	0.011	0.013	0.015	0.017	0.019	0.021	0.025	0.027
2-4	51-102										
4-6	102-152	209	211	213	215	217					
6-8	152-203		311	313	315	317					
8-10	203-254		411	413	415	417					
10-12	254-305			513	515	517	519	521	525		
12-14	305-356									627	
Flow (GPM)	---	0.09	0.12	0.18	0.24	0.31	0.39	0.47	0.67	0.78	
Flow (LPM)	---	0.34	0.45	0.68	0.91	1.17	1.47	1.78	2.53	2.95	

Maximum Working Pressure: 5000 PSI (34.5 MPa)

TR¹ REVERSIBLE TIP

- The best overall performing tip in the industry
- Fan pattern stays wider longer
- An orifice that outlasts competitive tips delivering consistent film thickness and less wasted paint
- Fits all Titan and most other industry spray gun guards

TR¹ Line Striping Tips 697-XXX

FAN PATTERN WIDTH	ORIFICE SIZE (INCHES)														
	INCHES	MM	0.013	0.015	0.017	0.019	0.021	0.023	0.025	0.027	0.029	0.031	0.035	0.039	0.043
2	51	213	215	217	219										
4	102	413	415	417	419	421	423	425	427	429	431	435	439	443	
6	152		615	617	619	621	623	625	627	629	631	635	639	643	
8-10	203-254					821	823	825	827	829	831	835	839	843	
Flow (GPM)	---	0.18	0.24	0.31	0.39	0.47	0.57	0.67	0.78	0.91	1.03	1.32	1.64	1.99	
Flow (LPM)	---	0.68	0.91	1.17	1.47	1.78	2.15	2.53	2.95	3.44	3.89	4.99	6.20	7.52	

Maximum Working Pressure: 5000 PSI (34.5 MPa)



TR¹ Reversible Tip

TR¹ High Pressure Tip

TR¹ Line Striping Tip

TR¹ High Pressure Tips 696-XXX

FAN PATTERN WIDTH	INCHES	MM	ORIFICE SIZE (INCHES)																			
			0.007	0.009	0.011	0.013	0.015	0.017	0.019	0.021	0.023	0.025	0.027	0.029	0.031	0.033	0.035	0.037	0.039	0.043	0.045	0.055
2-4	51-102	107	109	111	113	115	117	119														
4-6	102-152		209	211	213	215	217	219	221	223	225	227										
6-8	152-203			311	313	315	317	319	321	323	325	327	329	331	333	335	337	339				
8-10	203-254			411	413	415	417	419	421	423	425	427	429	431	433	435		439	443	445	455	
10-12	254-305		509		513	515	517	519	521	523	525	527	529	531	533	535	537	539	543	545	555	
12-14	305-356		609	611	613	615	617									627						655
14-16	356-406						717	719	721	723	725	727		731	733	735						
16-18	406-457						817	819	821							835	837	839				
18-20	457-508									923	925	927		931		937						
Flow (GPM)	---	0.05	0.09	0.13	0.18	0.24	0.31	0.39	0.47	0.57	0.67	0.78	0.91	1.03	1.17	1.32	1.40	1.64	1.99	2.18	3.26	
Flow (LPM)	---	0.19	0.34	0.45	0.68	0.91	1.17	1.47	1.78	2.15	2.53	2.95	3.44	3.89	4.42	4.99	5.29	6.20	7.52	8.24	12.32	

Maximum Working Pressure: 7700 PSI (53.1 MPa)

AIRLESS SPRAY TIPS

SC-6+ REVERSIBLE TIP

- ▶ The industry's longest lasting orifice
- ▶ Up to 22% wider fan pattern
- ▶ Fits all Titan and most industry standard guards



SC-6+ Reversible Tip

SC-6+ Synergy Fine Finishing Tip

SC-6+ Tips 662-XXX

		ORIFICE WIDTH (INCHES)																					
		INCHES	MM	0.007	0.009	0.011	0.013	0.015	0.017	0.019	0.021	0.023	0.025	0.027	0.029	0.031	0.033	0.035	0.039	0.043	0.045	0.051	0.055
FAN PATTERN WIDTH	2-4	51-102	107	109	111	113	115	117															
	4-6	102-152	207	209	211	213	215	217	219	221	223	225	227	229	231	233	235						
	6-8	152-203	307	309	311	313	315	317	319	321	323	325	327	329	331	333	335						
	8-10	203-254	407	409	411	413	415	417	419	421	423	425	427	429	431	433	435	439	443	445	451	455	
	10-12	254-305		509	511	513	515	517	519	521	523	525	527	529	531	533	535	539	543	545	551	555	
	12-14	305-356		609	611	613	615	617	619	621	623	625	627	629	631	633	635	639	643	645	651	655	
	14-16	356-406							719	721						731	735						
	16-18	406-457								821					831								
	Flow (GPM)	---	0.05	0.09	0.12	0.18	0.24	0.31	0.39	0.47	0.57	0.67	0.78	0.91	1.03	1.17	1.32	1.64	1.99	2.18	2.80	3.26	
	Flow (LPM)	---	0.19	0.34	0.45	0.68	0.91	1.17	1.47	1.78	2.15	2.53	2.95	3.44	3.89	4.42	4.99	6.20	7.52	8.24	10.58	12.32	

Maximum Working Pressure: 5000 PSI (34.5 MPa)

SC-6+ Widespray Tips 661-XXX

		ORIFICE SIZE (INCHES)											
		INCHES	MM	0.019	0.021	0.023	0.025	0.027	0.029	0.031	0.033	0.035	0.037
FAN PATTERN WIDTH	24-26	610-660	1219	1221	1223	1225	1227	1229	1231	1233	1235	1237	
	Flow (GPM)	---	0.39	0.47	0.57	0.67	0.78	0.91	1.03	1.17	1.32	1.47	
	Flow (LPM)	---	1.47	1.78	2.15	2.53	2.95	3.44	3.89	4.42	4.99	5.56	

Maximum Working Pressure: 5000 PSI (34.5 MPa)

SC-6+ Synergy Fine Finishing Tips 671-XXX

		ORIFICE SIZE (INCHES)					
		INCHES	MM	0.008	0.010	0.012	0.014
FAN PATTERN WIDTH	4-6	102-152	208	210	212	214	
	6-8	152-203	308	310	312	314	
	8-10	203-254	408	410	412	414	
	10-12	254-305		510	512		
	12-14	305-356			612		
	Flow (GPM)	---		0.07	0.11	0.16	0.21
	Flow (LPM)	---		0.26	0.42	0.60	0.79

Maximum Working Pressure: 5000 PSI (34.5 MPa)

Titan Specialty Tips

Flat Tips 002-XXX

- ▶ Precision machined from the highest quality tungsten carbide
- ▶ Over 150 sizes available
- ▶ Pressure rated to 5000 PSI



Adjustable, Self-Cleaning Tips 341-XXX

- ▶ Fan widths from 2" to 24"
- ▶ Perfect for cutting in for trim work or around windows
- ▶ Self-cleaning—eliminates downtime



ORIFICE RANGE	COATING RANGE	PART NO.
.005-.018	Lacquer and Stain	341-015
.007-.019	Lacquer and Stain	341-020
.007-.026	Lacquer and Enamels	341-024
.011-.026	Lacquer and Enamels	341-028
.017-.035	High Builds	341-041
.021-.054	Very Heavy	341-049

WEAR GUARD

CONVENIENCE PROGRAM

PLATINUM PROGRAM

GET A SPARE FLUID SECTION

at a discounted rate
when you purchase a qualifying sprayer below:



LEVEL 1 Impact® 410 **\$172⁰⁰**
CAD \$225.00

LEVEL 4 PowrTwin® 4900, 6900, 8900, 12000 Plus; PowrBeast™ 4700, 4700T, 7700, 9700; PowrLiner™ 4955, 6955, 8955 **\$350⁰⁰**
CAD \$469.00

LEVEL 2 Impact® 440, 540, 640; MultiFinish® 440; PowrLiner® 2850 **\$250⁰⁰**
CAD \$327.00

LEVEL 5 Impact 1040T, 1640; PowrTwin® 6900 Plus DI, 12000 Plus DI **\$400⁰⁰**
CAD \$524.00

*IMPACT® 440, 540 640 FLUID SECTIONS
INCLUDE **\$375 IN ADDED FEATURES**

MANIFOLD FILTER HOUSING | PRESSURE TRANSDUCER | SUREFLO™ PUSHER VALVE | PRIME SPRAY VALVE

LEVEL 6 Hydra® Pro IV, M4000, M2000; PowrCoat® 730, 745, 940, 960, 975, 1045, 1064, 1072 **\$635⁰⁰**
CAD \$832.00

LEVEL 3 Impact® 740, 840, 1040, 1140 **\$275⁰⁰**
CAD \$360.00

ELITE PROGRAM

LEVEL 1 Elite™ 3000, 3500; PowrLiner 3500 **\$125⁰⁰**
CAD \$164.00

GET A PERMASTROKE KIT

at a discounted rate
when you purchase a qualifying sprayer



CONNECTOR APP
Available for download
theconnectorapp.com

Call Technical Services at
1-800-526-5362
for complete warranty information.

All information contained in this brochure is based on the latest information available at the time of printing. Titan reserves the right to make changes at any time, without notice. Due to continuous innovation, specifications may progressively change. Contact one of our dependable sales reps or call our dedicated customer service team for more information.